

## **Battery Charger Replacement**

### Tools Included:


- Key
- Phillips screwdriver
- 1/2" wrench

- **Battery Charger Replacement**


1. Open the door to the Battery Box (need key).



2. Inside the Battery box on the left hand side is the battery charger. Unplug the battery charger cord from the Tripp-Lite surge suppressor and the back of the battery charger. Then unhook the battery charger leads from the batteries.

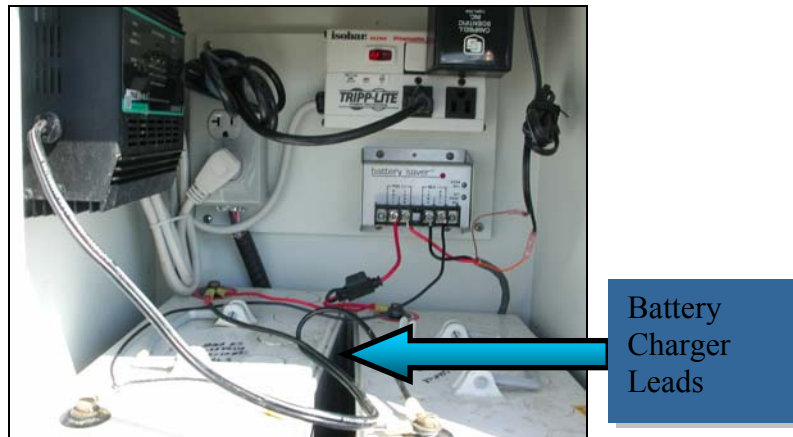

3. The battery charger is held in place by four screws. To remove the charger, lightly loosen the four screws and then push up and pull out.

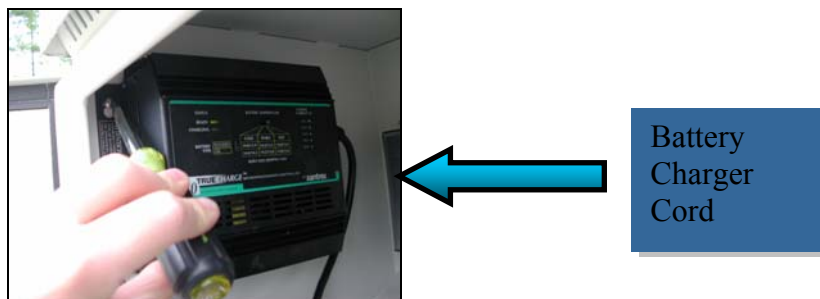

4. Installation is the opposite of removal.